BenchLight™ - SL Model

100W

COLOR CODE	SL
PART NUMBER	**GRW-120-24-100-SL-S-C**
ORDER CODE	**70-1011**
PERFORMANCE	
WATTS (MAX)	100
PPF	276
PPE	2.64
POWER INPUT	100~277VAC 50/60Hz
COLOR RANGE (nm)	400-700
UV	NO
FAR RED	NO
SPECTRUM BOOSTER	N/A
FACTORY DEFAULT RATIO	6:1
BEST RATIO RANGE	1:1~10:1
CONTROLS	
DIMMING	YES
CONTROL BOX	YES
APP	YES
BLUETOOTH®	NO
WIFI	YES
LYNX3™	NO
SMARTUNE™	NO
PHYSICAL STATS	
COOLING	PASSIVE, FANLESS COOLING
DIMENSIONS	780mm x 140mm x 76 mm (30.7" x 5.5" x 3.0")
WEIGHT	4.08 kg (9.0 lbs)
IP RATING	IP66
CERTIFICATIONS	
UL	YES
DLC	YES
WARRANTY	5 YEARS
RATED LIFETIME	L70 50,000 Hours

The BenchLight™ SL (Sunlight) model is designed to mimic the visible PAR range of the sun. Suitable for applications from 1-foot to 4-foot installations. This model is designed to produce the same color profile of visible sunlight. However, it is fully adjustable with the controller and APP technology.

Full control of the color ratio and intensity, through the Grow3™ Controller. The SL model is designed for best operation between 1:1 to 10:1 ratios while maintaining a steady PPE.

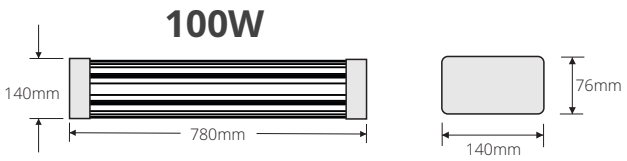

COLOR RATIO EXAMPLE

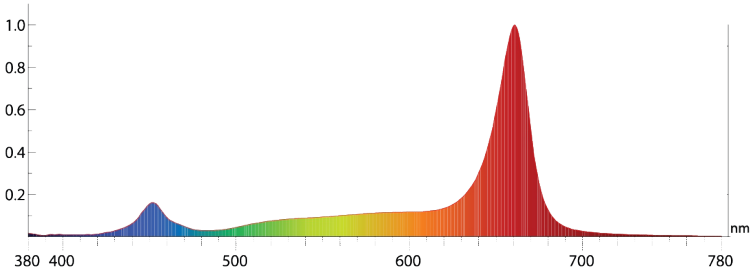

EXAMPLE: DEFAULT COLOR RATIO 6:1 AT 100% ILLUMINANCE

INCLUDED WITH LIGHT FIXTURE

74-1001 - POWER CABLE, 1.5M

75-1002 - HANGING KIT, 2M (2PCS)

OPTIONAL ACCESSORIES*

72-1001 - GROW3, CONTROLLER

74-1002 - 0.5M SIGNAL CABLE

*Most common accessories shown, contact LED Smart for full list of available accessories.

LED Smart Inc. works continually to improve our products, we reserve the right to change or modify the designs or specifications of this product at any time without prior notice.
All rights reserved. This product is under a patent and patent pending protection.