

TopLight[™] - HC Model






	HC
PART NUMBER	GRW-120-48-320-HC-S-C
ORDER CODE	70-1025
PERFORMANCE	
WATTS (MAX)	320
PPF (µmol/s)	769
PPE (µmol/J)	2.42
POWER INPUT	100~277VAC 50/60Hz
COLOR RANGE (nm)	400-700
UV	NO
FAR RED	NO
SPECTRUM BOOSTER	RED
FACTORY DEFAULT RATIO	3:1
BEST RATIO RANGE	1:1~10:1
CONTROLS	
DIMMING	YES
CONTROL BOX	YES
APP	YES
BLUETOOTH®	YES
WIFI	YES
LYNX3™	YES
SMARTUNE™	YES
PHYSICAL STATS	
COOLING	PASSIVE, FANLESS COOLING
DIMENSIONS	1240mm x 140mm x 76 mm
	(48.4" x 5.5" x 3.0")
WEIGHT	6.8 kg (15 lbs)
IP RATING	IP66
CERTIFICATIONS	
UL	PENDING
DLC	PENDING
WARRANTY	5 YEARS
RATED LIFETIME	L70 50,000 Hours


The TopLight™ HC model is designed as a replacement for 1000W HPS lights. Designed for high ceiling mounting, up to 14' to penetrate deep through the crop canopy, without loss of PPFD and maintaining a high PPE.

The HC Series is most efficient between 1:1 to 10:1 ratios.

Save more energy when used with LYNX3™ and SmarTune™ controls.




COLOR RATIO EXAMPLE

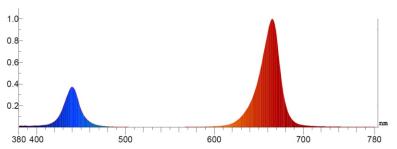

EXAMPLE: COLOR RATIO WITH DEFAULT 4:1 AT 100% ILLUMINANCE

COMPLIMENTARY COLOR RANGE



ACCESSORIES INCLUDED



74-1022 - POWER CABLE, 1.5M (4.92")



75-1002 - HANGING KIT, 2M (2PCS)

LED Smart Inc. works continually to improve our products, we reserve the right to change or modify the designs or specifications of this product at any time without prior notice. All rights reserved. This product is under a patent and patent pending protection.