

## 300W



**LYNX3™ SmartTune™**

<b>COLOR CODE</b>	<b>WW</b>
<b>PART NUMBER</b>	<b>GRW-120-48-300-WW-S-C</b>
<b>ORDER CODE</b>	<b>70-1018</b>

PERFORMANCE	
WATTS (MAX)	300
PPF (μmol/s)	729
PPE (μmol/J)	2.44
POWER INPUT	100~277VAC 50/60Hz
COLOR RANGE (nm)	400-700
UV	NO
FAR RED	NO
SPECTRUM BOOSTER	N/A
FACTORY DEFAULT RATIO	0.65:1
BEST RATIO RANGE	0.5:1 ~ 1.5:1


CONTROLS	
DIMMING	YES
CONTROL BOX	YES
APP	YES
BLUETOOTH®	YES
WIFI	YES
LYNX3™	YES
SMARTUNE™	YES

PHYSICAL STATS	
COOLING	PASSIVE, FANLESS COOLING
DIMENSIONS	1240mm x 140mm x 76 mm (48.4" x 5.5" x 3.0")
WEIGHT	6.35 kg (14 lbs)
IP RATING	IP66


CERTIFICATIONS	
UL	PENDING
DLC	PENDING
WARRANTY	5 YEARS
RATED LIFETIME	L70 50,000 Hours

The TopLight™ WW model is designed with full spectrum white LEDs. As a targeted light delivery like that of bright noon daylight. This contributes even color spectrum, with contributions from 400-700nm, with contribution of green and yellow light too. Red:Blue ratios as low as 0.57:1 with options for color ratio adjustment up to 1.5:1.

Save more energy when used with LYNX3™ and SmartTune™ controls.

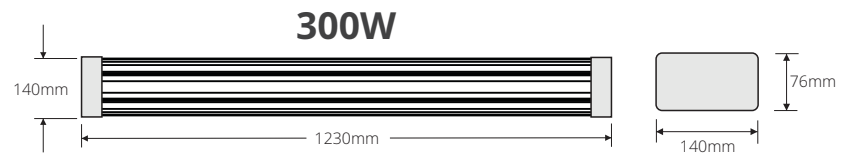


## COLOR RATIO EXAMPLE

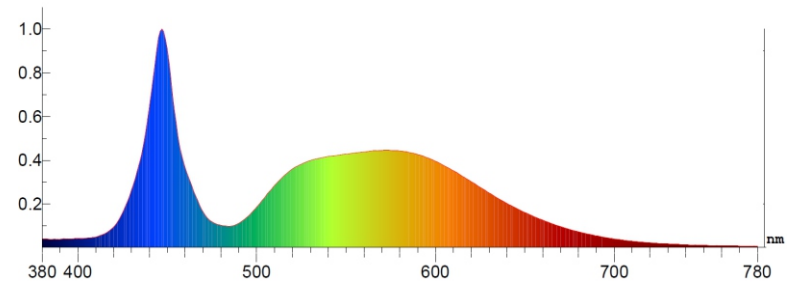

EXAMPLE: COLOR RATIO WITH DEFAULT 0.57:1 AT 100% ILLUMINANCE

## COMPLIMENTARY COLOR RANGE



## ACCESSORIES INCLUDED

