TopLight™ - WW Model

300W

The TopLight™ WW model is designed with full spectrum white LEDs. As a targeted light delivery like that of bright noon daylight. This contributes even color spectrum, with contributions from 400-700nm, with contribution of green and yellow light too. Red:Blue ratios as low as 0.57:1 with options for color ratio adjustment up to 1.5:1.

Save more energy when used with LYNX3™ and SmarTune™ controls.

COLOR CODE	**WW**
PART NUMBER	**GRW-120-48-300-WW-S-C**
ORDER CODE	**70-1018**
PERFORMANCE	
WATTS (MAX)	300
PPF (µmol/s)	729
PPE (µmol/J)	2.44
POWER INPUT	100~277VAC 50/60Hz
COLOR RANGE (nm)	400-700
UV	NO
FAR RED	NO
SPECTRUM BOOSTER	N/A
FACTORY DEFAULT RATIO	0.65:1
BEST RATIO RANGE	0.5:1 ~ 1.5:1
CONTROLS	
DIMMING	YES
CONTROL BOX	YES
APP	YES
BLUETOOTH®	YES
WIFI	YES
LYNX3™	YES
SMARTUNE™	YES
PHYSICAL STATS	
COOLING	PASSIVE, FANLESS COOLING
DIMENSIONS	1240mm x 140mm x 76 mm (48.4" x 5.5" x 3.0")
WEIGHT	6.35 kg (14 lbs)
IP RATING	IP66
CERTIFICATIONS	
UL	*PENDING*
DLC	*PENDING*
WARRANTY	5 YEARS
RATED LIFETIME	L70 50,000 Hours

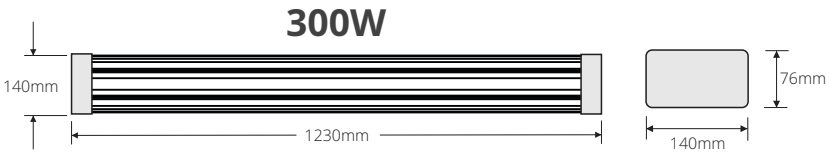

COLOR RATIO EXAMPLE

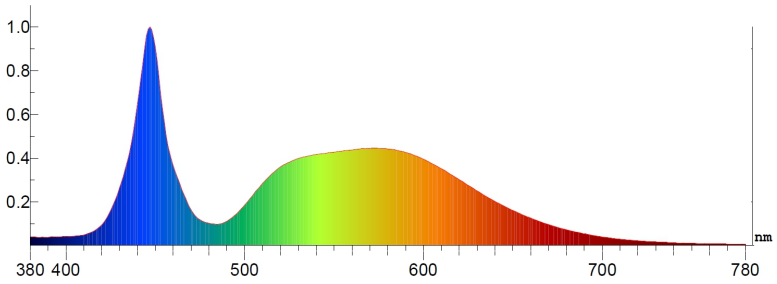

EXAMPLE: COLOR RATIO WITH DEFAULT 0.57:1 AT 100% ILLUMINANCE

ACCESSORIES INCLUDED

74-1022 - POWER CABLE, 1.5M (4.92")

75-1002 - HANGING KIT, 2M (2PCS)

LED Smart Inc. works continually to improve our products, we reserve the right to change or modify the designs or specifications of this product at any time without prior notice.
All rights reserved. This product is under a patent and patent pending protection.